
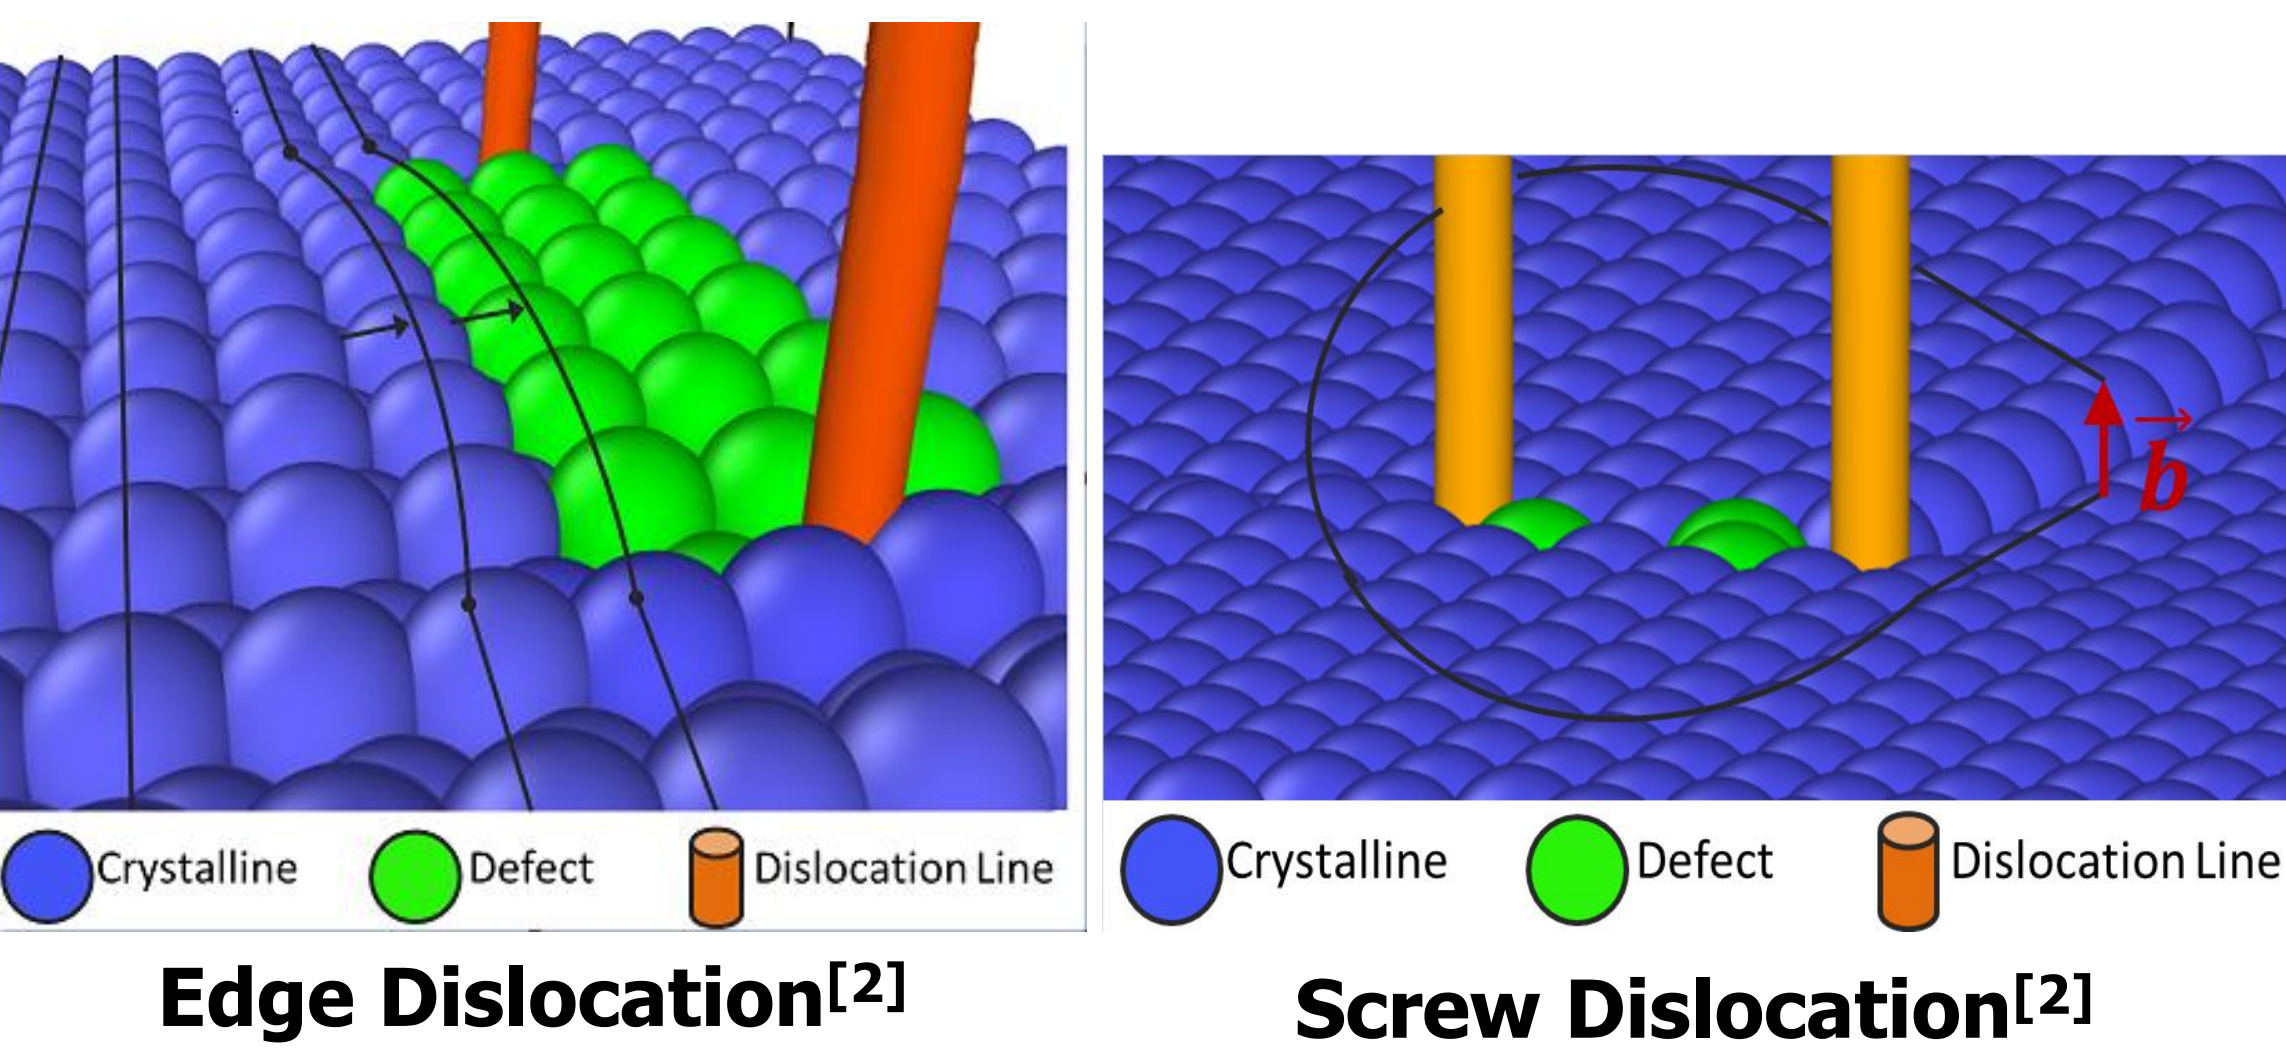



## Background

- Dislocations, or atomic linear defects in crystal structures, dictate much of the mechanical response of materials
- No current predictive dislocation analysis tool on the nanoHUB
- Simulation tools such as Molecular dynamics solve for the movement of atoms, and in turn the dislocations

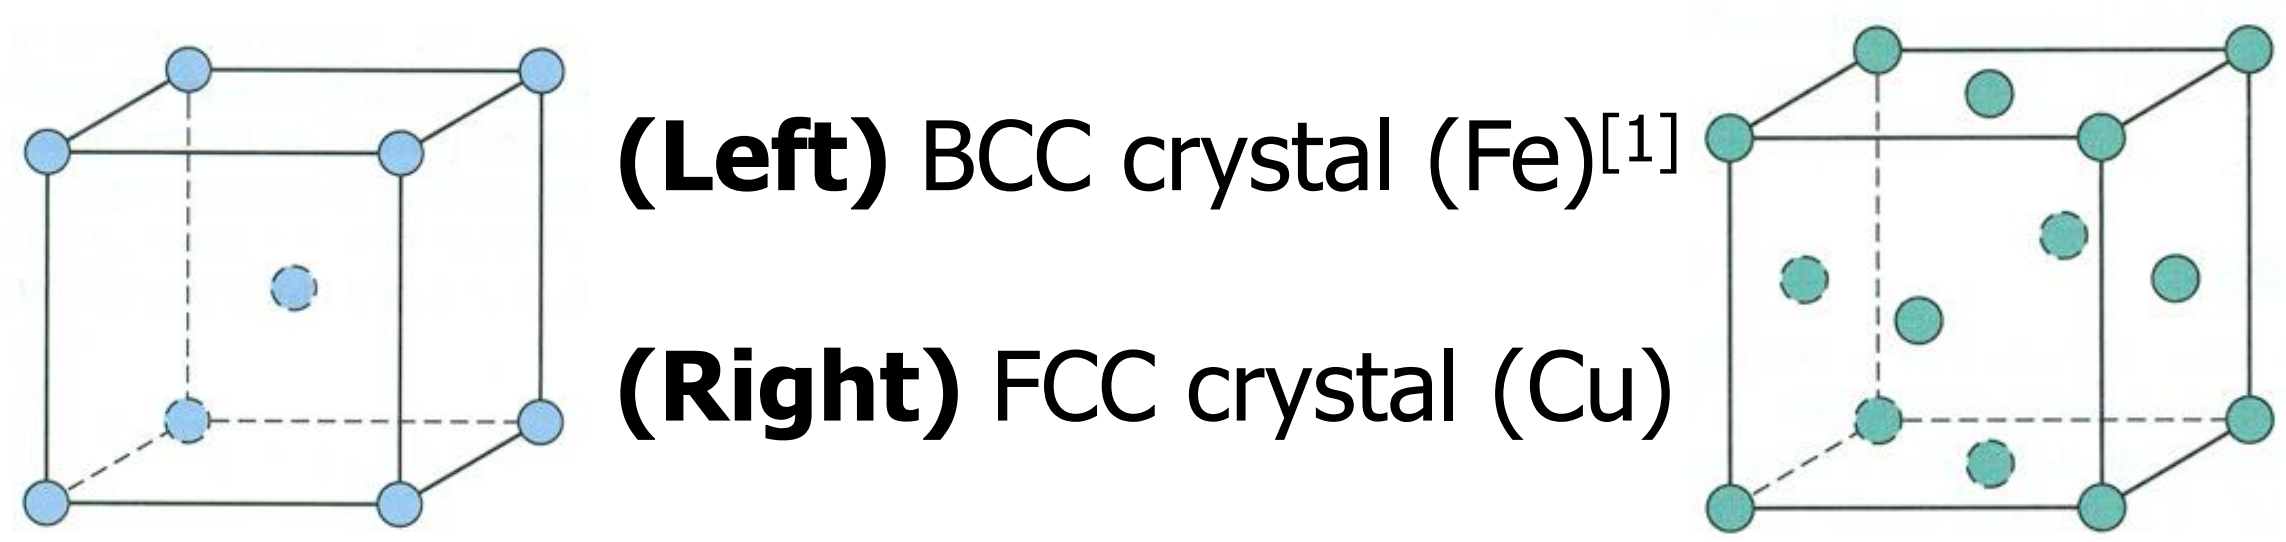

## Graphical User Interface(GUI)

- Our objective aims to create a GUI to enable wide spread use of simulation tools to predict the behavior of defects in metals


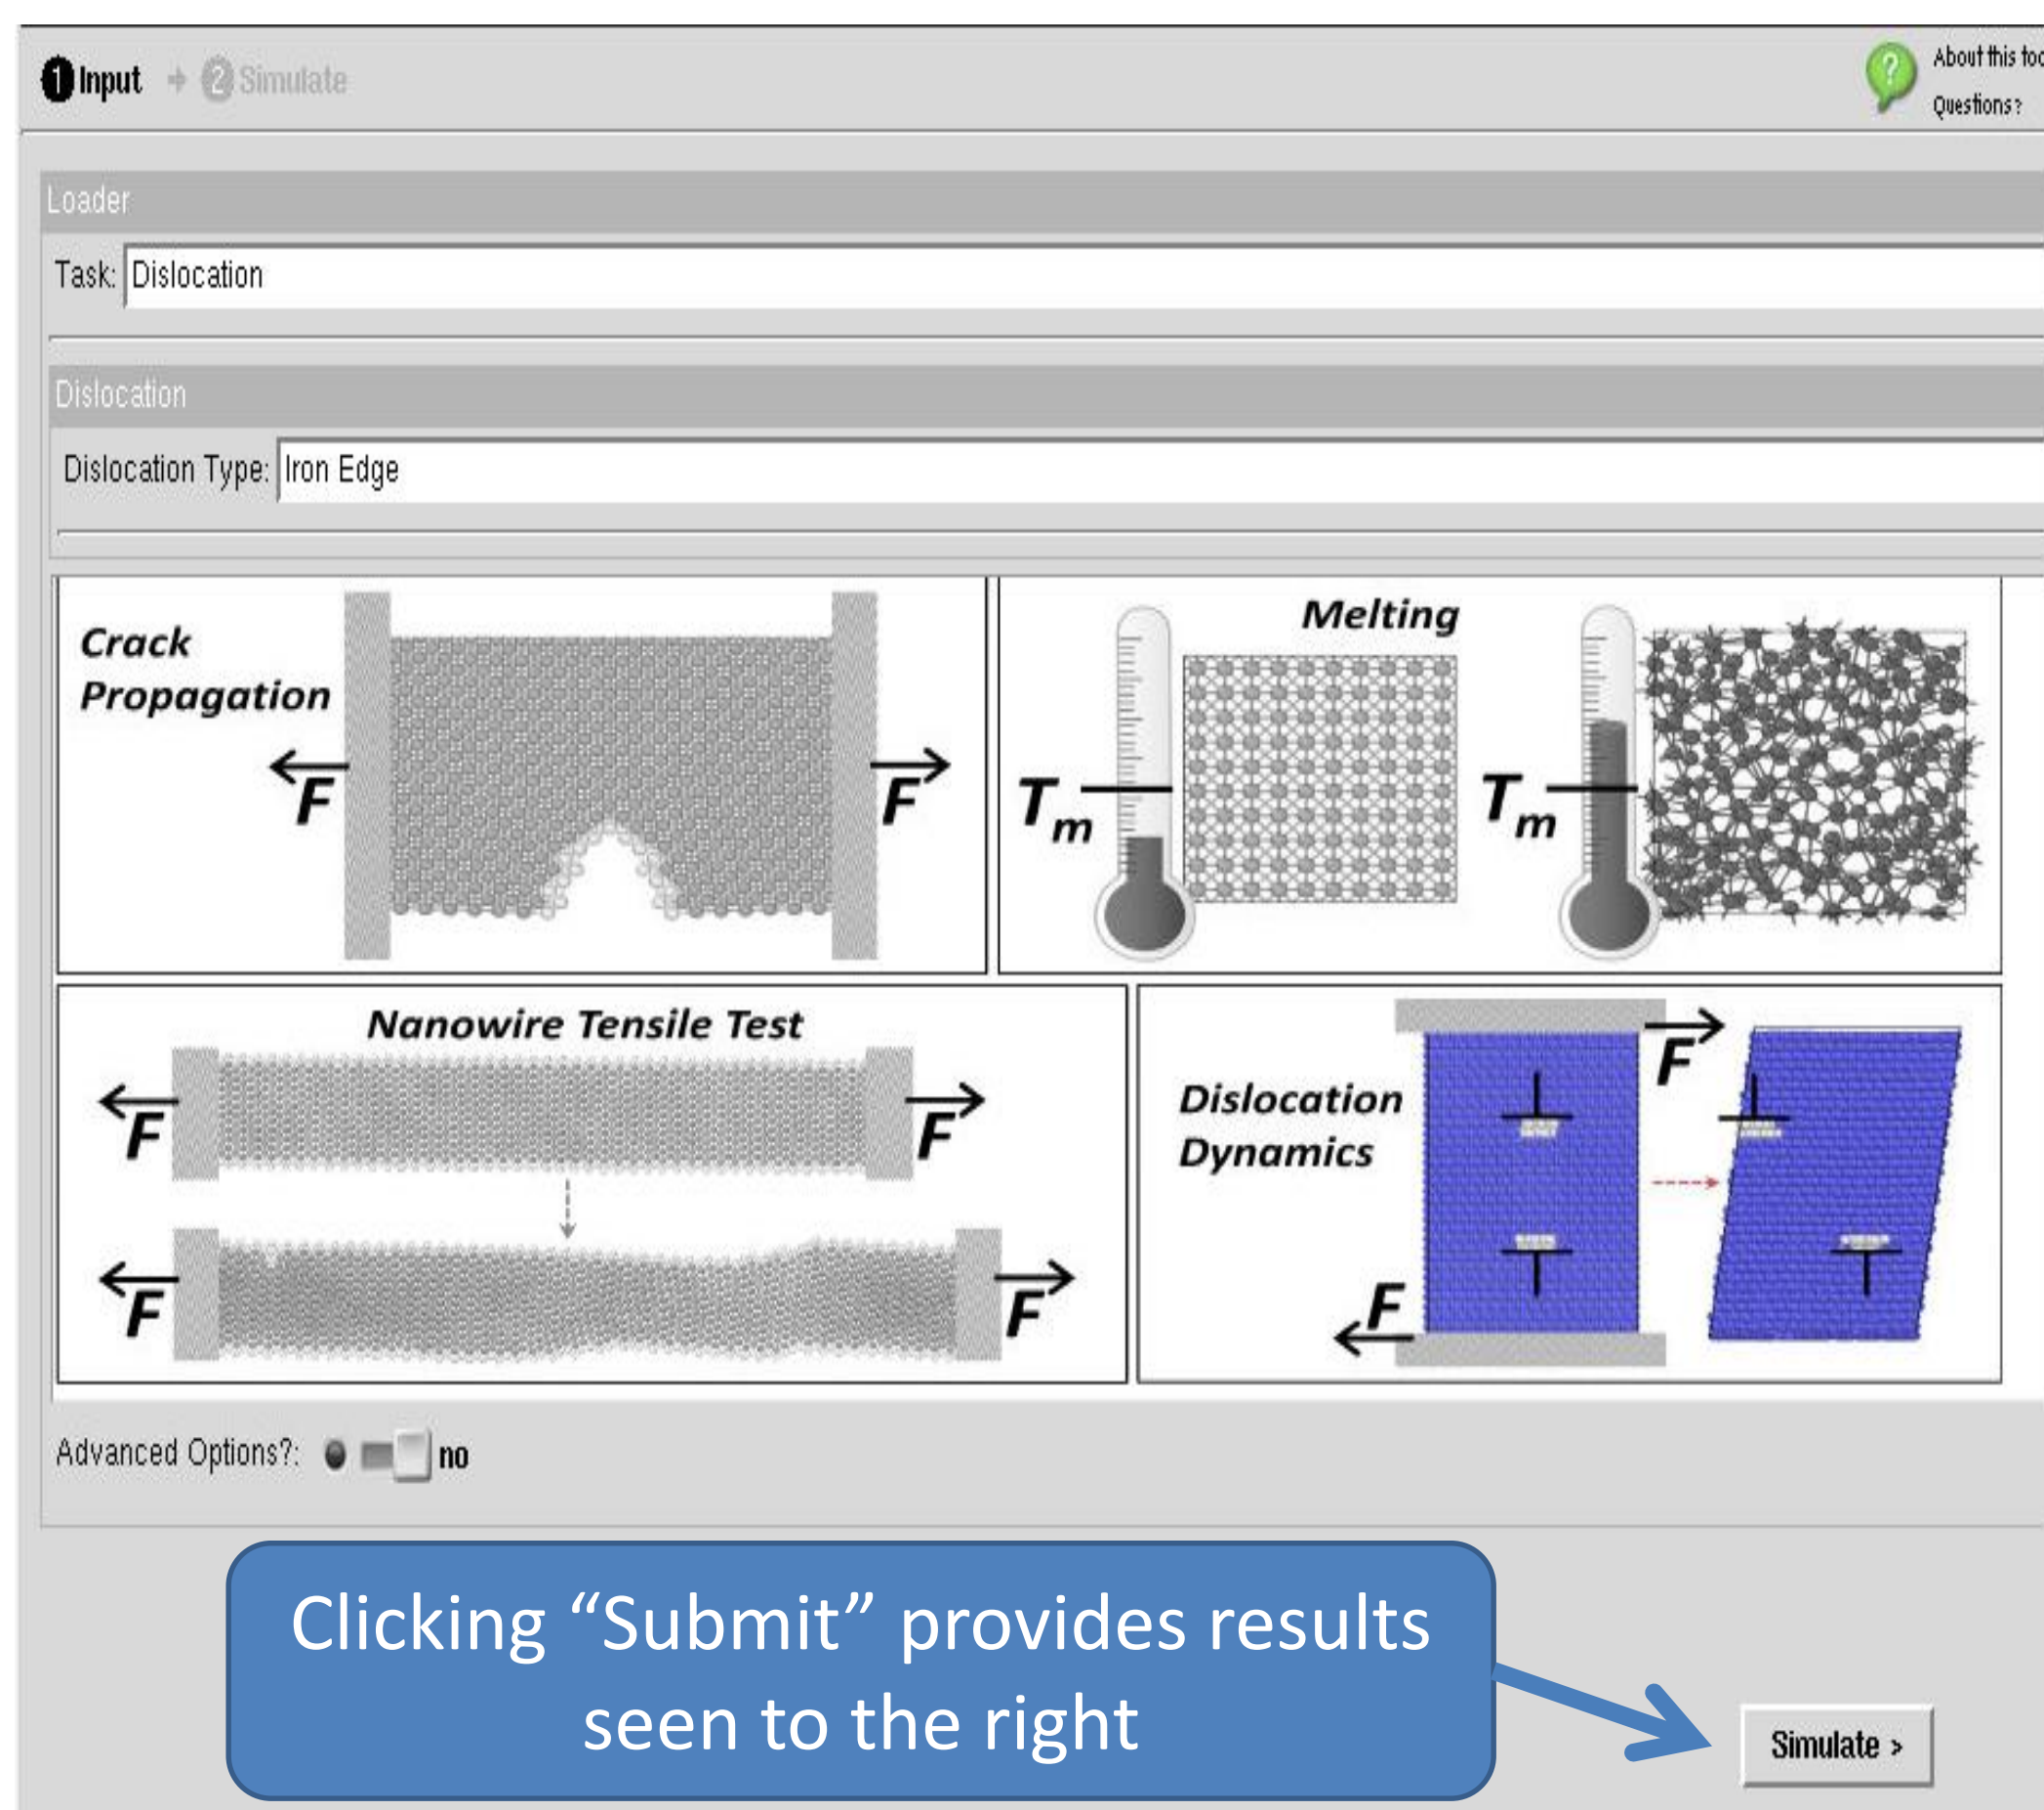


## Simulation results of edge dislocation movement

<https://nanohub.org/tools/nanomatmech>

Initial state of the simulation

Dislocation Core

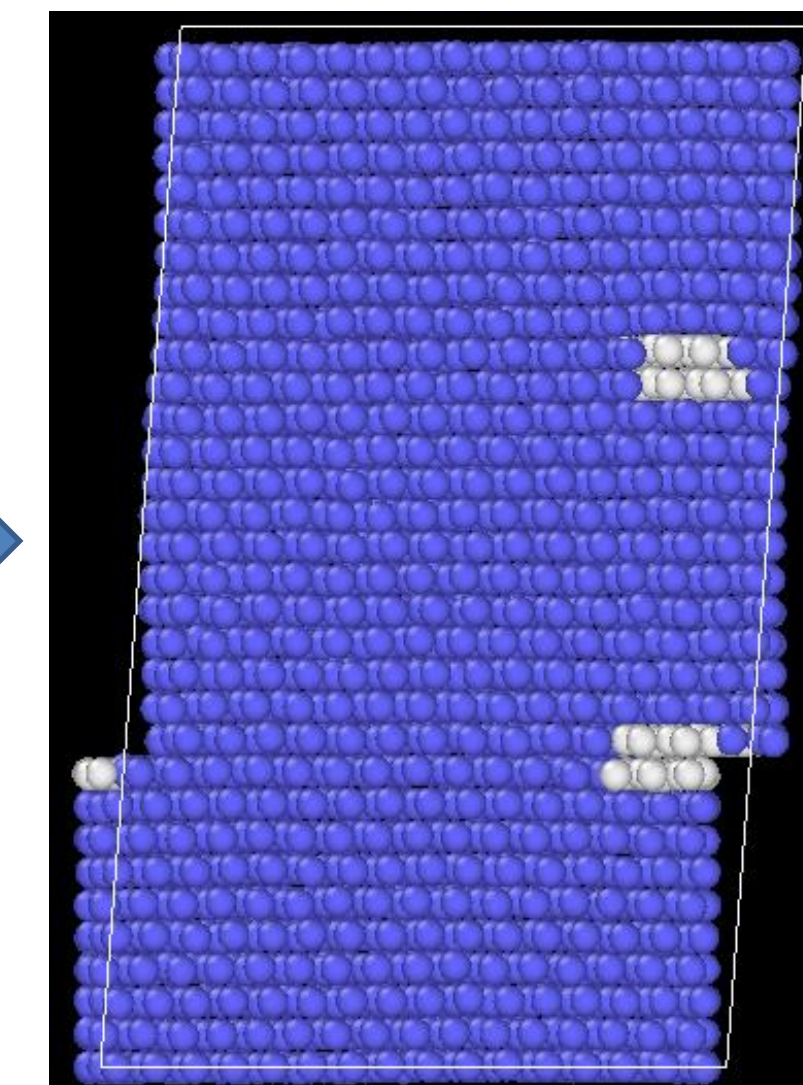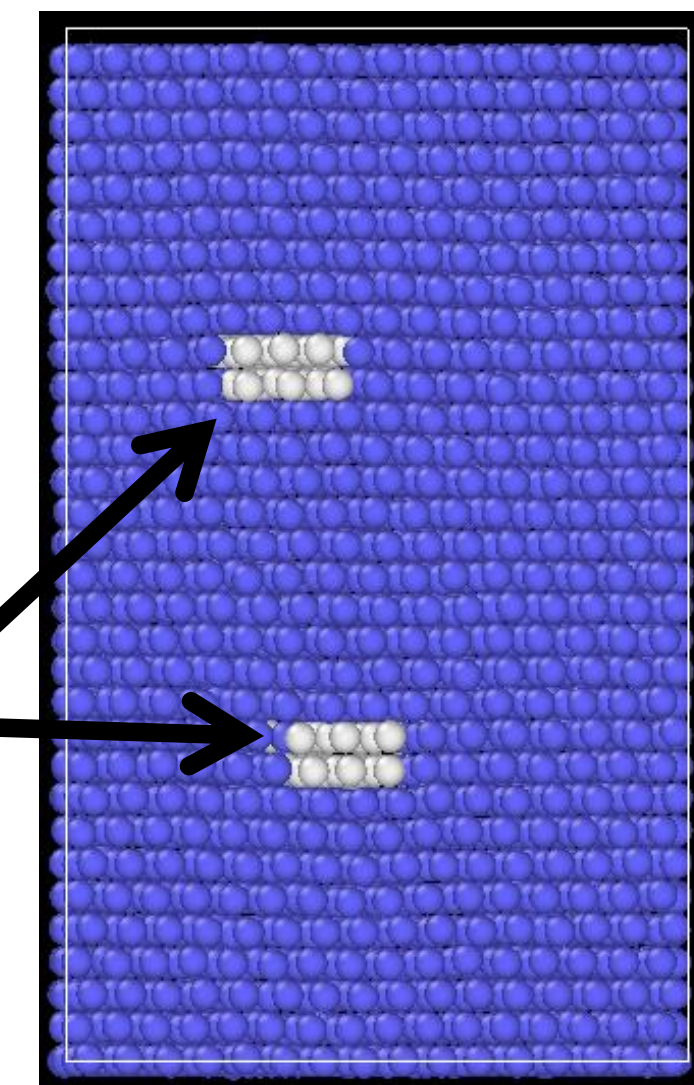


Final state of the simulation where the applied shear moves the dislocation. Defects are created and simulated using the LAMMPS<sup>[4]</sup> simulation package.

## Characterizing Defects using MD


Dislocation Motion (Resolved Shear Stress)

vs.


Dislocation Nucleation (No Resolved Shear Stress)

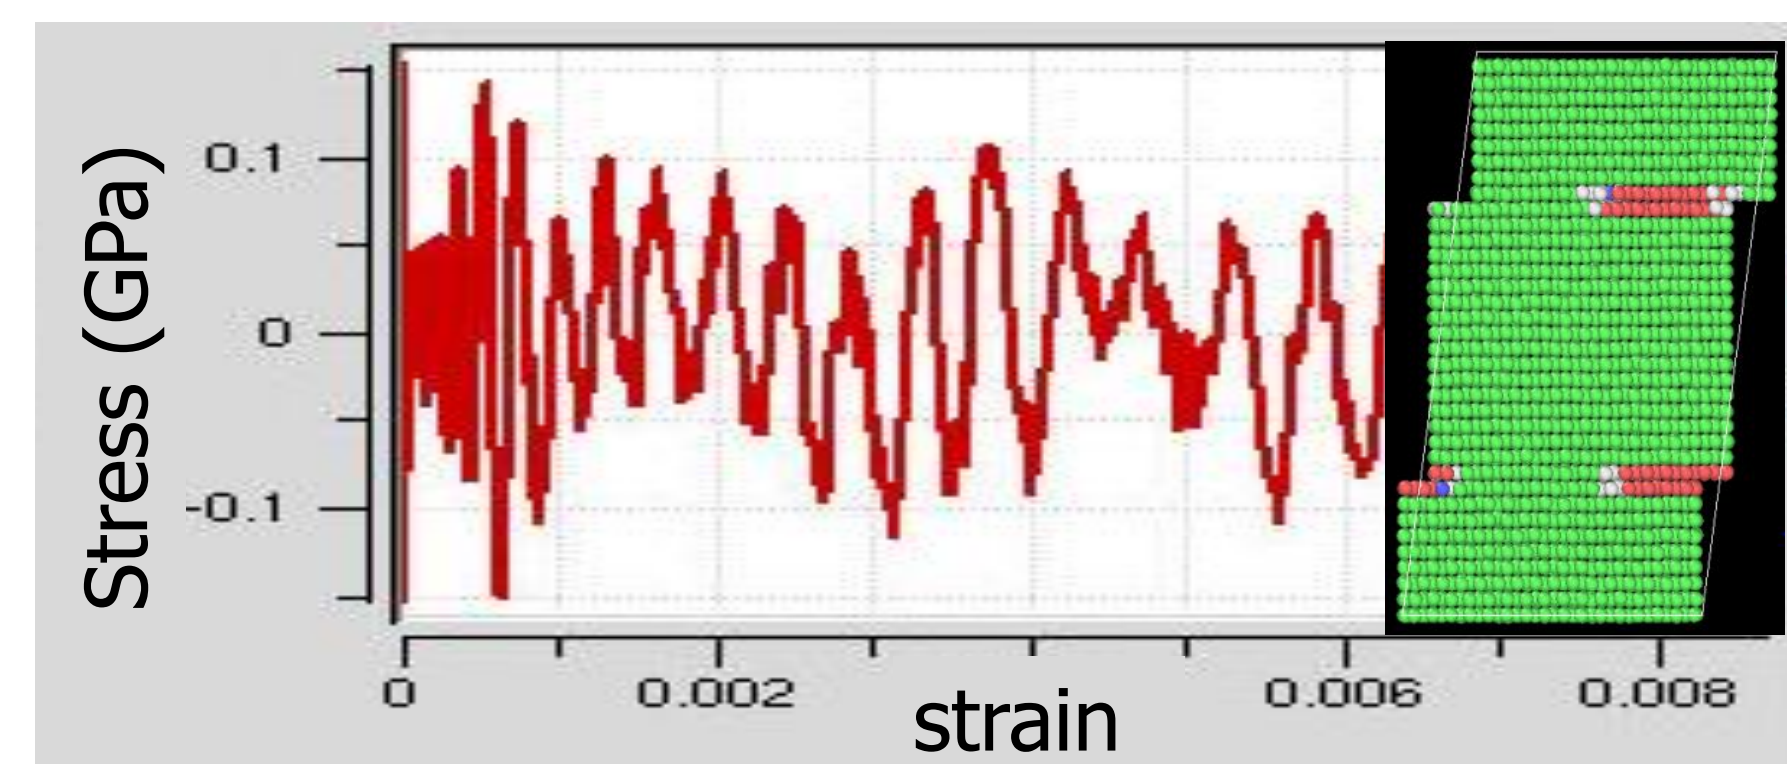


Edge Dislocation FCC Copper<sup>[3]</sup> – Oscillation around 0 GPa conveys gliding motion

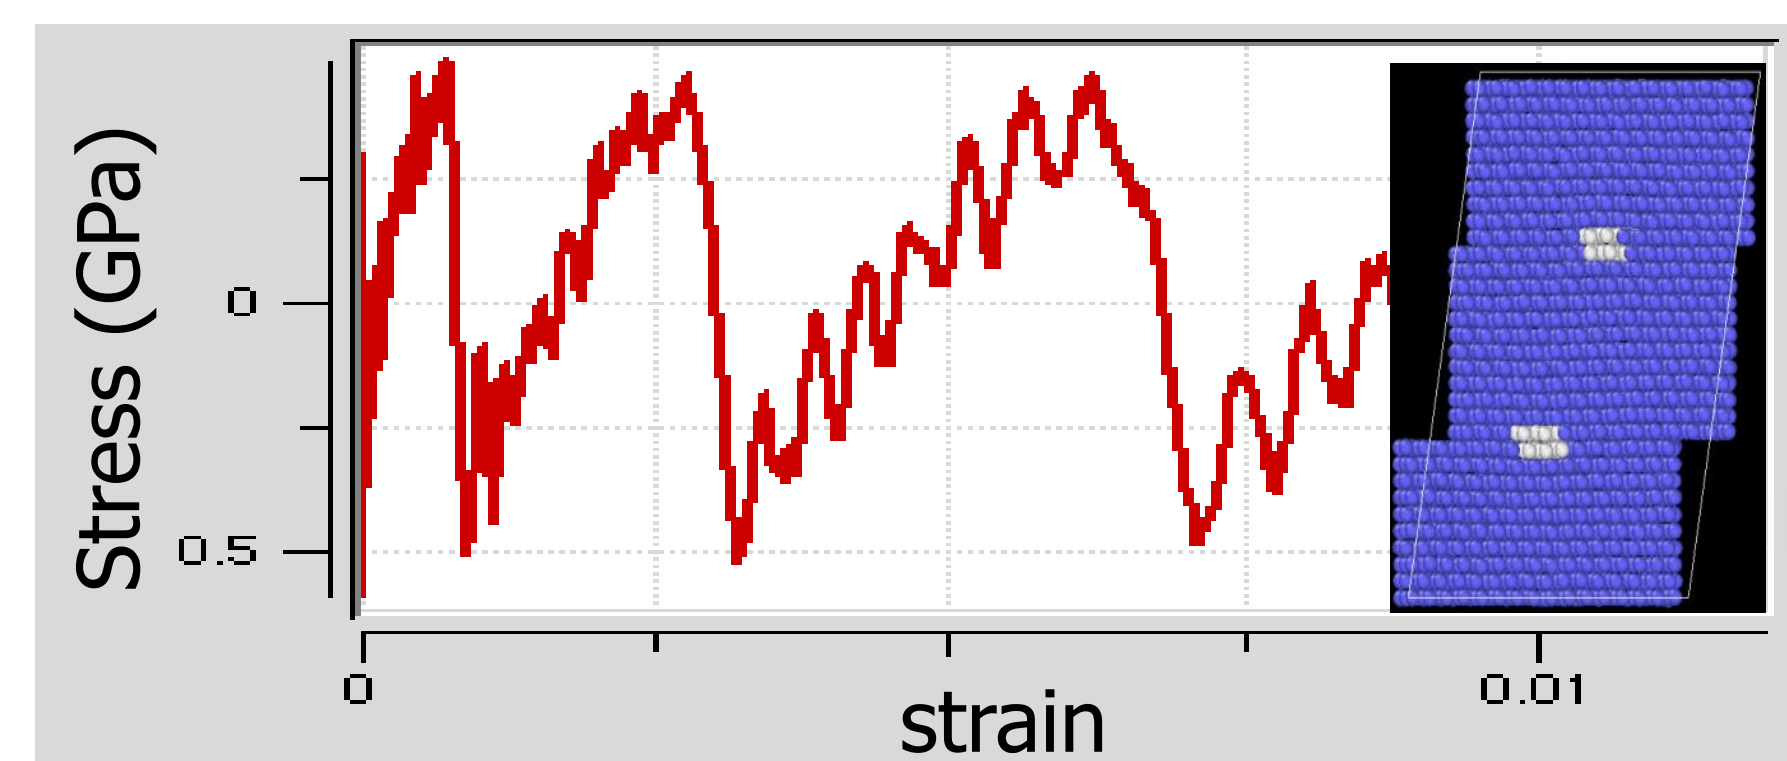


Edge Dislocation BCC Iron<sup>[3]</sup> – Increasing stress implies single dislocation takes more stress to move than two partials in a FCC crystal

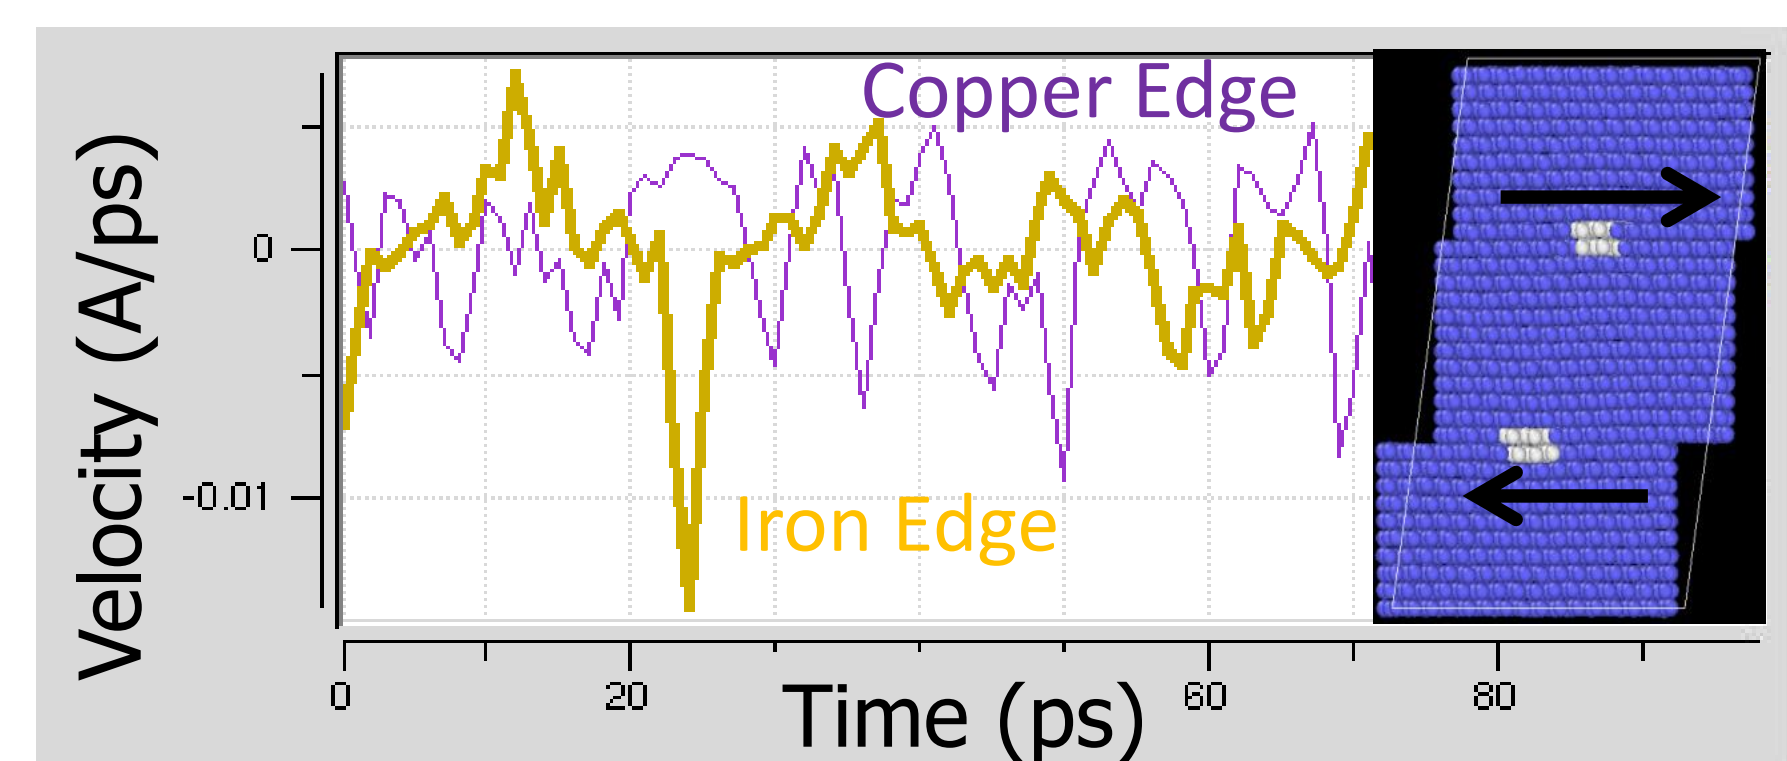


Edge Velocities<sup>[3]</sup> – Dislocation cores move at roughly constant value for constant shear rate

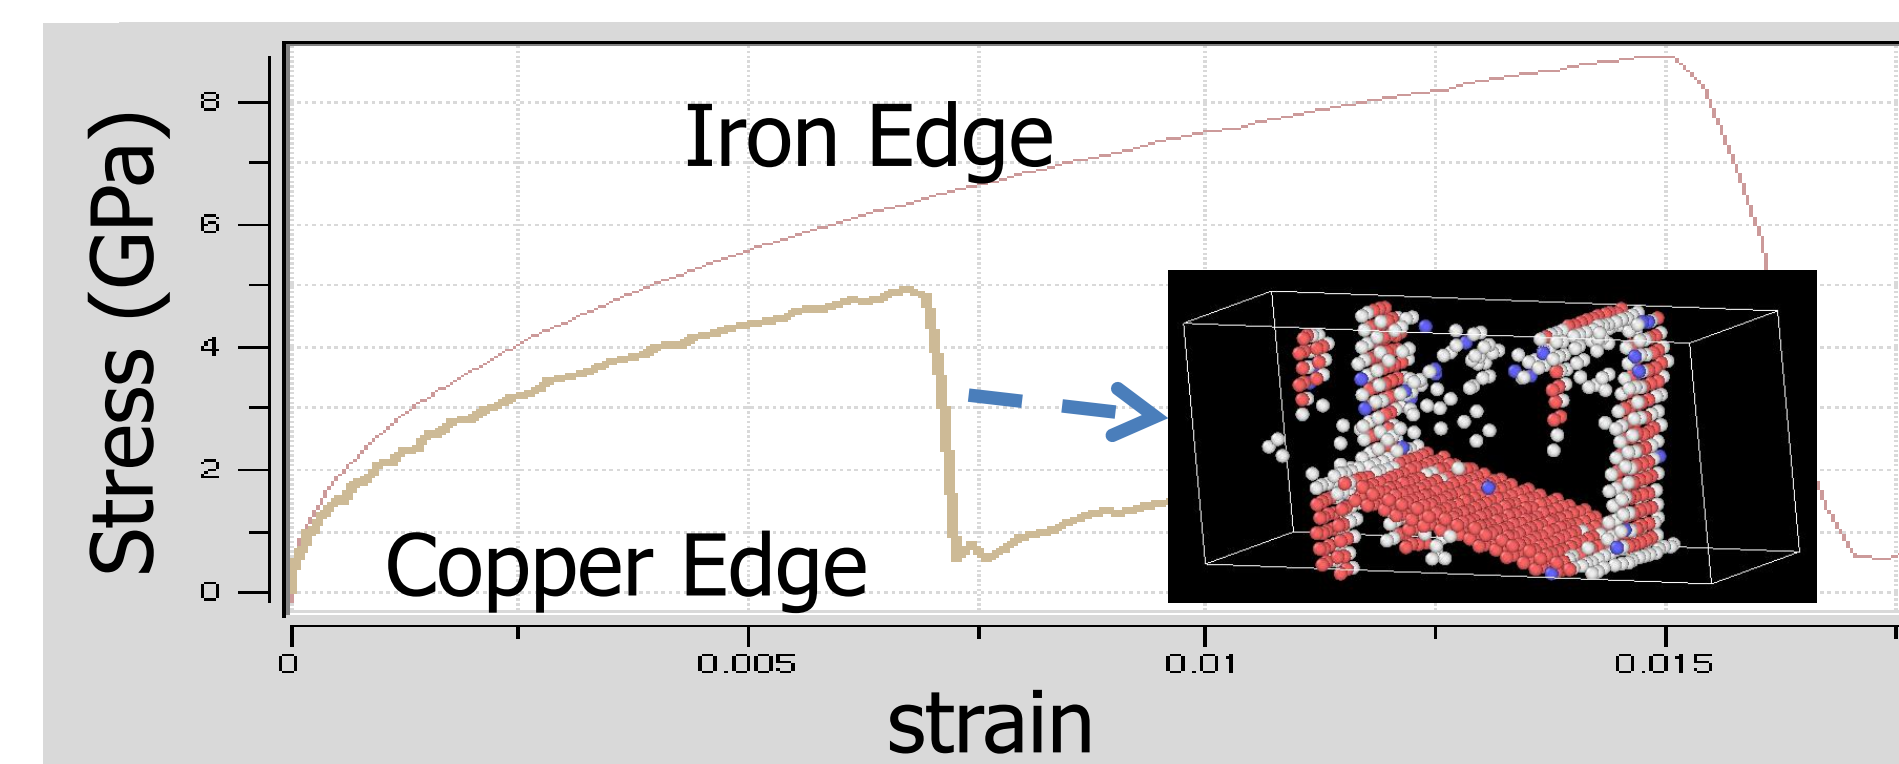

Fixed Strain Rate and Temperature<sup>[3]</sup> – Different magnitudes because dislocations in Copper are partials compared to Iron. Inset shows an example nucleation event at high strain

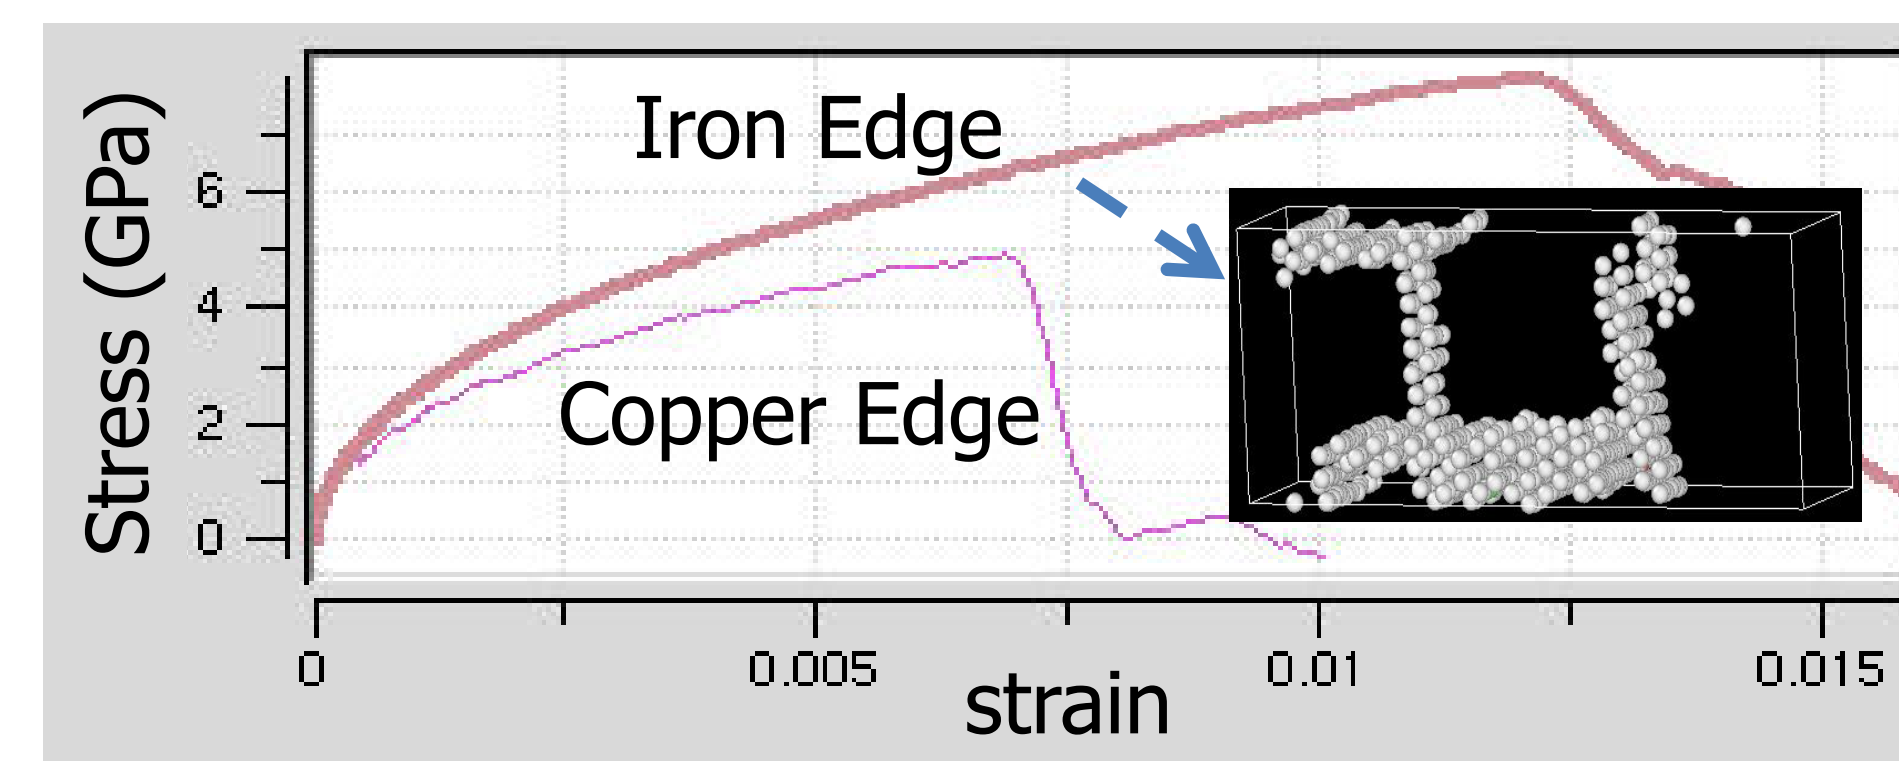


Double Strain Rate<sup>[3]</sup> – Yielding occurs at lower strain, material acts more brittle

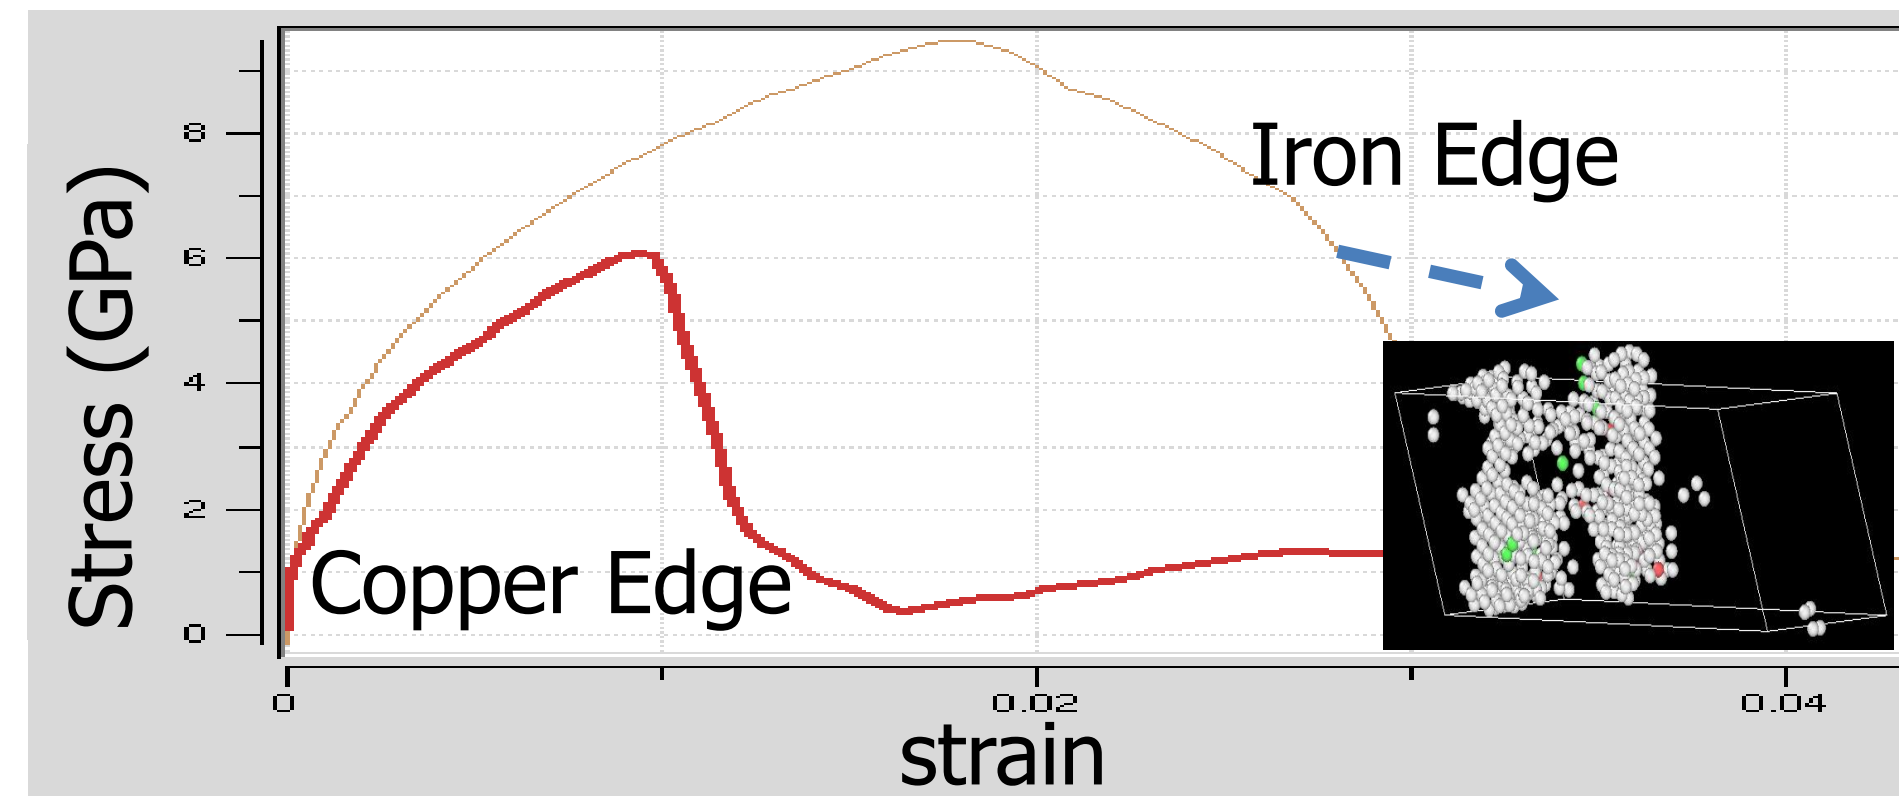

Reduced Temperature<sup>[3]</sup> – Yielding occurs at much later strain, BCC material acts more brittle

## Discussion

- Dislocation type depends on relative orientation of: Burgers vector (direction of atom shift), dislocation line and slip plane (closed packed)
- Dot product of the applied shear stress aligns with the slip plane is known as resolved stress (i.e. what moves the dislocation)

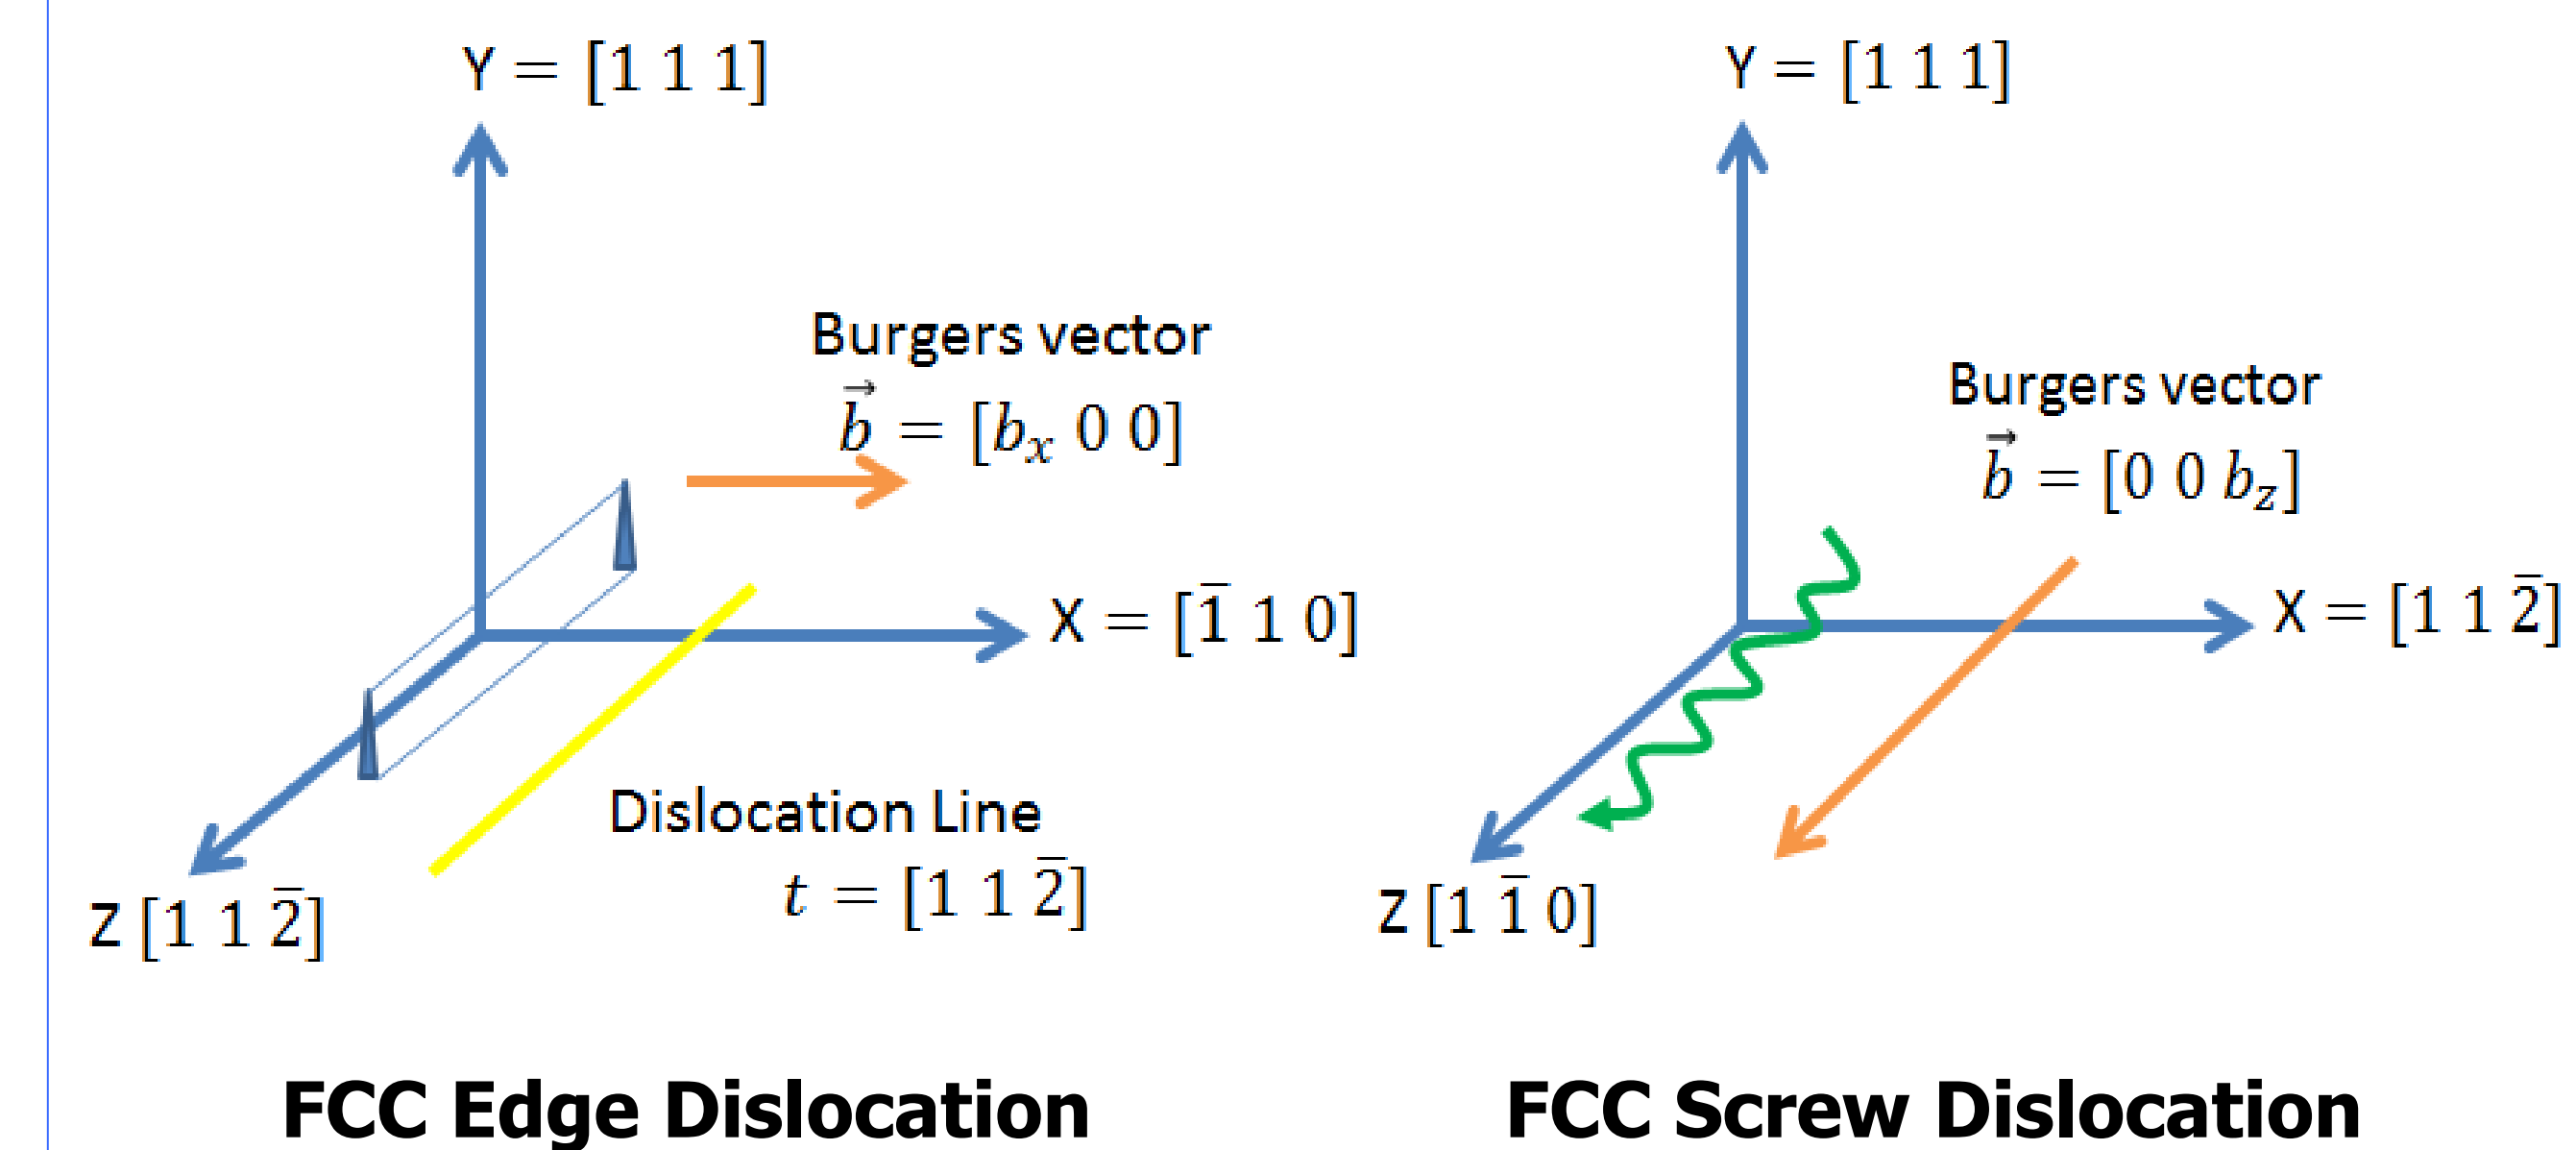

## Conclusion

- Dislocation behavior dependent on crystal and orientation
- Shear stress causes dislocations to glide or nucleate
- Replicates the behavior of bulk material by modeling at the nanoscale
- GUI presents the topic in a user-friendly manner
- Advanced users can freely create and define their own simulation parameters

## Future Work

- More materials/crystal structures
- Uncertainty Quantification (UQ)
- Greater input flexibility
- Upload user data and input files

## References

- [1] Callister, William D. *Material Science and Engineering An Introduction*. York: Quebecor Versailles, 2007. Print.
- [2] Ovito A. Stukowski, *Modelling Simul. Mater. Sci. Eng.* 18, 015012 (2010)
- [3] Rappture.org
- [4] LAMMPS software package (lammps.sandia.gov)